




## Installation Manual

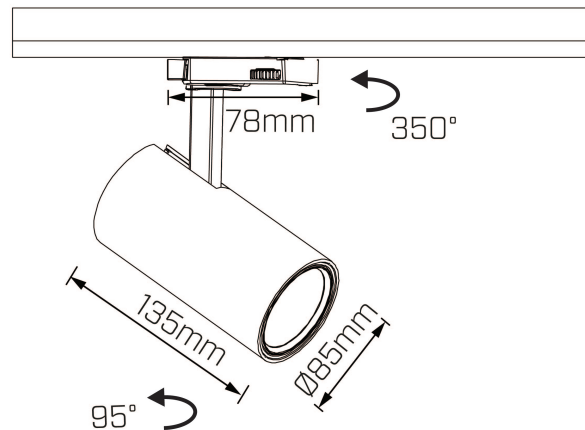

### Warnings

- The safety and compliance of this fitting are not assured unless the following instructions are adhered to. Please retain these instructions for future reference.
- Always turn the mains OFF prior to installation. See Picture below.
- The system is IEC 60570:2003+AMD1:2017 certified and Installation must be carried out by a licensed electrician
- Risk of Electric Shock: Prior to installation or maintenance, disconnect the fitting from power supply and other control wiring. Faulty cables and wiring need to be replaced by manufacturer only.
- Risk of Burns: When in use, the fitting's surface may reach high temperatures and can cause skin burns. It is recommended to install the fitting out of reach to avoid any physical contact.
- It is recommended to always wear safety glasses and gloves during installation.
- For safety reasons please keep children away from installation site.
- Please follow below instructions for disposal in accordance with EU Directive WEEE (Waste Electrical and Electronic Equipment):
  - *Fittings cannot be disposed alongside other household waste.*
  - *Remove the lamp/ battery for decommissioning (if applicable)*
  - *Send them to nearest WEEE collection center.*
- For further inquiries, please contact Mondolux at <https://www.mondolux.com.au/>

## Notes

- This fitting requires 220-240V AC/50HZ power input to the driver.
- Do not interchange any parts of this fitting.
- A minimum distance of 75mm is required around the fitting to allow for air ventilation.
- Allow a minimum distance between fitting and illuminated subject of 800mm.
- Do not touch fitting when in use.
- Do not cover with any form of heat proof material.
- If you have any questions about the installation of this product, please contact Mondolux.

## Installation Steps

1. Ensure the mains power is turned off before installing the fittings.
2. Set the adapter switch to "OFF or 0".
3. Check for correct orientation of the adapter.
4. Press the adapter into track and turn locking lever to lock the adapter into track.
5. Rotate adapter switch to ● select circuit 1 or 3 or 2.
6. Ensure that the adapter switch is always set to "OFF or 0" before removing it.

