


## Light check: 1,2



- Highly polished reflector with anodised finish is made of 99.8% pure aluminium
- Also comes in the Monza version with one spot head
- Powerful illumination options in 26W, 40W, 54W, 72W, 86W, 100W
- Tilts 0° - 20°
- 700mA variations approved under VEU and IPART

## Product info

System Lumen Range	1900lm — 8800lm
System Power	26W, 40W, 54W, 72W, 86W, 100W
Forward Current	350mA, 500mA, 700mA, 900mA, 1050mA, 1200mA
System Efficacy Range	73lm/W to 88lm/W
Input Voltage	240V
Body/Trim Colour	White, Black
Installation Method	Adjustable Recessed
LED Brand	Citizen
IP Rating	IP20
Diffuser	Clear
Dimming Type	Non-Dimmable, Phase-Cut Dimmable, DALI Dimmable
Maximum Tilt Angle	20°
Accessories	Without Accessory, Bold Trim
VEU/IPART Approved	MD49AR-700mA
Custom Dimming Type	Available on request

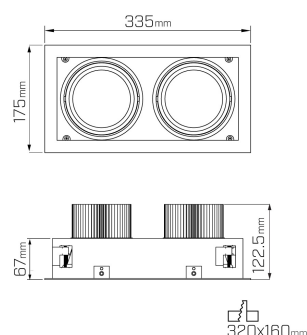

## Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K, 3000K Vivid, 3500K, 4000K
Beam Angle	10°, 18°, 28°, 48°
Custom Colour Temperature (CCT)	Available on request
Revit Files	Please choose Beam Angle / Power within the Revit file

## Compliance and Features

RoHS




## Packaging


Box Weight	2.2
Box Dimensions L x W x H mm	342 mm x 180 mm x 135 mm
Boxes per Carton	8
Carton Weight	17 KG
Carton Dimensions L x W x H mm	550 mm x 350 mm x 280 mm

## Polar distribution diagrams


Monza Duo 11°

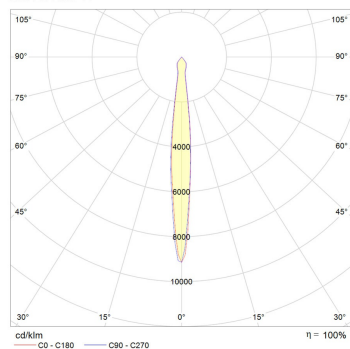

Monza Duo 18°

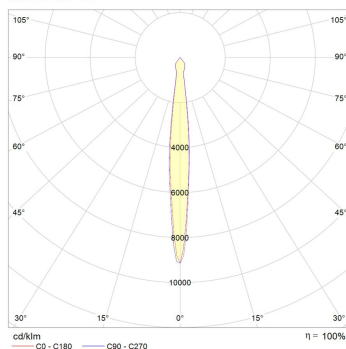

Monza Duo 29°

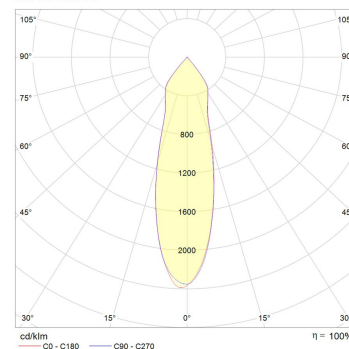

Monza Duo 48°

