


Project initialise or retrofit modernise



- Part of the Siena family: trim Ø240mm, cut-out Ø170mm, 13W - 50W
- High luminous flux up to 4300lm
- Beam angle options: 12°, 20°, 40°, 60°
- Excellent heat management with die cast aluminium housing
- Siena Maxi 900mA approved under VEU/IPART

Product info

| | |
|------------------------|--|
| System Lumen Range | 950lm — 4300lm |
| System Power | 13W, 19W, 28W, 36W, 43W, 50W |
| Forward Current | 350mA, 500mA, 700mA, 900mA, 1050mA, 1200mA |
| System Efficacy Range | 73lm/W to 86lm/W |
| Input Voltage | 240V |
| Body/Trim Colour | White, Black |
| Installation Method | Adjustable Recessed |
| LED Brand | Citizen |
| IP Rating | IP20 |
| Diffuser | Clear |
| Dimming Type | Non-Dimmable |
| Maximum Tilt Angle | 70° |
| Maximum Rotation Angle | 350° |
| Accessories | Without Accessory |
| VEU/IPART Approved | MD63AR-900mA |
| Custom Dimming Type | Available on request |



Photometric info

| | |
|---------------------------------|--|
| Colour Rendering Index (CRI) | CRI90 |
| Colour Temperature (CCT) | 3000K, 3000K Vivid, 3500K, 4000K |
| Beam Angle | 12°, 20°, 40°, 60° |
| Light Output Ratio (LOR) | >85% |
| Custom Colour Temperature (CCT) | Available on request |
| Revit Files | Please choose Beam Angle / Power within the Revit file |

Compliance

RoHS




Packaging


| | |
|--------------------------------|--------------------------|
| Box Weight | 1kg |
| Box Dimensions L x W x H mm | 220 mm x 200 mm x 200 mm |
| Boxes per Carton | 8 |
| Carton Dimensions L x W x H mm | 620 mm x 450 mm x 400 mm |

Polar distribution diagrams


Siena Maxi 15°

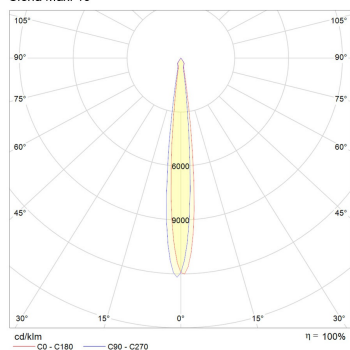

Siena Maxi 24°

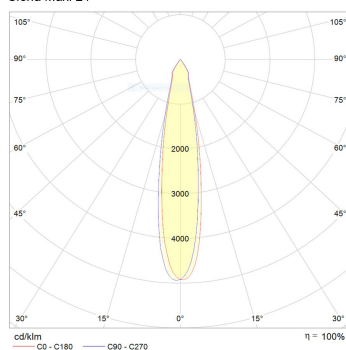

Siena Maxi 40°

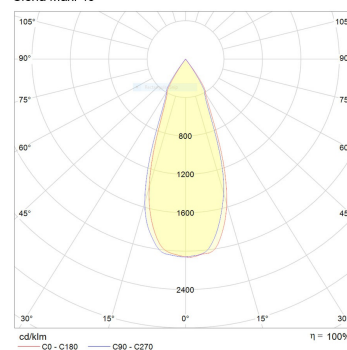

Siena Maxi 60°

