




## Project initialise or retrofit modernise

- Part of the Siena family: trim Ø184mm, cut-out Ø170mm, 13W - 60W
- Excellent heat management with die cast aluminium housing
- Supports both natural white and warmer optics 3000K, 3000K Vivid, 3500K, 4000K

### Product info

System Lumen Range	950lm — 4300lm
System Power	13W, 19W, 28W, 36W, 43W, 50W
Forward Current	350mA, 500mA, 700mA, 900mA, 1050mA, 1200mA
System Efficacy Range	73lm/W to 86lm/W
Input Voltage	240V
Body/Trim Colour	White, Black
Installation Method	Adjustable Recessed
LED Brand	Citizen
IP Rating	IP20
Diffuser	Clear
Dimming Type	Non-Dimmable
Maximum Tilt Angle	70°
Maximum Rotation Angle	350°
Accessories	Without Accessory
Custom Dimming Type	Available on request

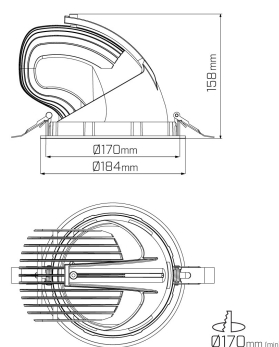

### Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K, 3000K Vivid, 3500K, 4000K
Beam Angle	12°, 20°, 40°, 60°
Light Output Ratio (LOR)	>85%
Custom Colour Temperature (CCT)	Available on request
Revit Files	Please choose Beam Angle / Power within the Revit file

## Compliance

RoHS




## Packaging


Box Weight	1kg
Box Dimensions L x W x H mm	220 mm x 200 mm x 200 mm
Boxes per Carton	12
Carton Dimensions L x W x H mm	620 mm x 450 mm x 400 mm

## Polar distribution diagrams


Siena Midi 15°

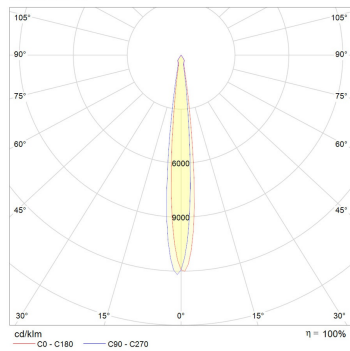

Siena Midi 24°

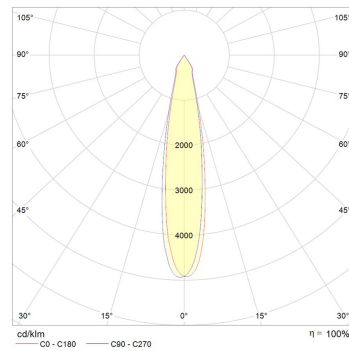

Siena Midi 40°

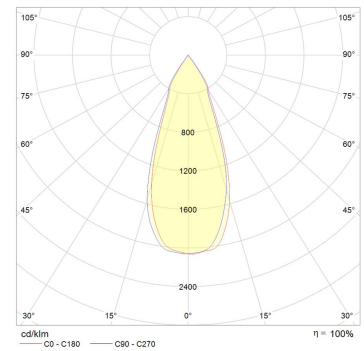

Siena Midi 60°

