




Project initialise or retrofit modernise

- Part of the Siena family: trim Ø143mm, cut-out Ø135mm, 13W - 28W
- Various beam angle options: 12°, 20°, 40°, 60°
- Supports both natural white and warmer optics 3000K, 3000K Vivid, 3500K, 4000K
- Excellent heat management with die cast aluminium housing

Product info

| | |
|------------------------|---------------------|
| System Lumen Range | 950lm — 2900lm |
| System Power | 13W, 19W, 28W |
| Forward Current | 350mA, 500mA, 700mA |
| System Efficacy Range | 73lm/W to 104lm/W |
| Input Voltage | 240V |
| Body/Trim Colour | White, Black |
| Installation Method | Adjustable Recessed |
| LED Brand | Citizen |
| IP Rating | IP20 |
| Diffuser | Clear |
| Dimming Type | Non-Dimmable |
| Maximum Tilt Angle | 70° |
| Maximum Rotation Angle | 350° |
| Accessories | Without Accessory |

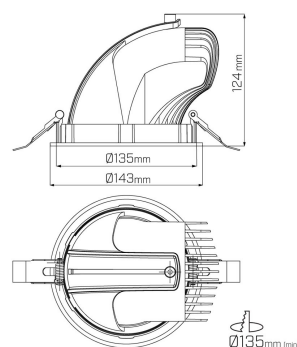

Photometric info

| | |
|------------------------------|--|
| Colour Rendering Index (CRI) | CRI90 |
| Colour Temperature (CCT) | 3000K, 3000K Vivid, 3500K, 4000K |
| Beam Angle | 12°, 20°, 40°, 60° |
| Light Output Ratio (LOR) | >85% |
| Revit Files | Please choose Beam Angle / Power within the Revit file |

Compliance

RoHS




Packaging


| | |
|--------------------------------|--------------------------|
| Box Weight | 1kg |
| Box Dimensions L x W x H mm | 160 mm x 160 mm x 150 mm |
| Boxes per Carton | 18 |
| Carton Dimensions L x W x H mm | 500 mm x 500 mm x 310 mm |

Polar distribution diagrams


Siena Tiny 15°

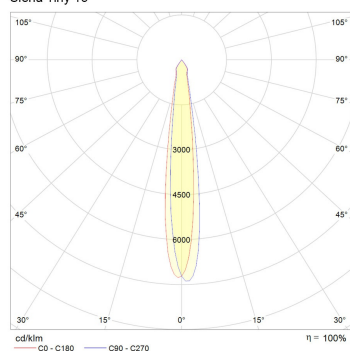

Siena Tiny 24°

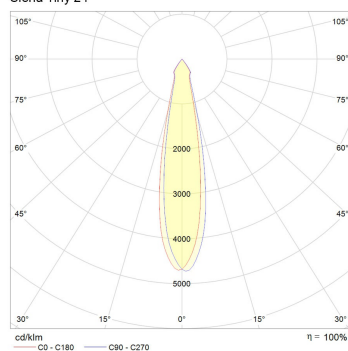

Siena Tiny 40°

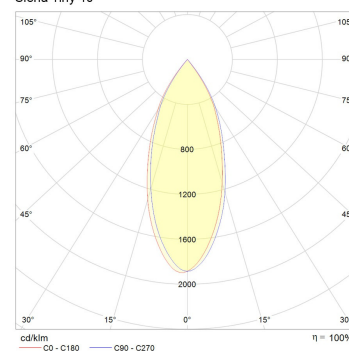

Siena Tiny 60°

